

WORK LIGHTS OF THE FUTURE

PRICELIST | H1 2025



CONTENT

General WORK LIGHTS

WORK LIGHTS	04
-------------	----

CONNECT	16
---------	----

SPECIALIZED work lights

COLOUR MATCH	22
--------------	----

EX PROOF	26
----------	----

UV-CURING	28
-----------	----

SCANGRIP Accessories	30
----------------------	----

Technical terms and details in 13 languages	32
--	----

DISCOUNT rates

General WORK LIGHTS

A **B** **C** **D** **E**

SPECIALIZED work lights

CM **EX** **UV**

MAG series

	 MAG PEN 3	 MINI MAG PRO	 MAG	 MAG PRO
Product number	03.5116	03.5692	03.5400	03.5690
Light source	COB LED Spot: CREE XP-G2	COB LED Spot: High-power LED	10 SMD LEDs Spot: High-power LED	COB LED Spot: High-power LED
Luminous flux, lumen	15-150 Spot: 80	20-200 Spot: 80	150-300 Spot: 80	60-600 Spot: 150
Adjustable light output	Stepless	Stepless	2 levels	Stepless
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2	2	2.5	1.5
Operating time with min. lumen, h	20	20	5	15
Charging time, h	3.5	3	4	4
Battery	3.7 V / 750 mAh Li-ion	3.7 V / 1200 mAh Li-ion	3.7 V / 2200 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP20	IP54	IP20	IP54
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	1 m USB	1 m USB	1 m USB	1 m USB
Operating voltage AC	-	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A	5 V / 1 A
Power consumption	Max 2.5 W	Max 2.5 W	Max 3.5 W	Max 6.5 W
Charger incl.	No	No	Country-specific	Country-specific
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	174 x 31 x 21 mm	200 x 40 x 28 mm	260 x 61 x 43 mm	261 x 62 x 43 mm
Net weight	78 g	157 g	252 g	339 g
Price	€ 37.90	€ 42.90	€ 52.90	€ 64.90

UNIFORM series

	 UNIPEN	 MINIFORM	 UNIFORM
Product number	03.6209	03.6207	03.6208
Light source	High-efficiency multi-LED design with 20 LEDs	High-efficiency multi-LED design with 20 LEDs	High-efficiency multi-LED design with 32 LEDs
Luminous flux, lumen	15-150 Spot: 75	20-200 Spot: 120	50-500 Spot: 175
OPTILight setting	500 lux@0.25 m	500 lux@0.25 m	500 lux@0.5 m
Adjustable light output	3 levels	3 levels	3 levels
Beam angle	100° Spot: 50°	115° Spot: 35°	110° Spot: 30°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	5700 K	5700 K	5700 K
Operating time max. / min. lumen, h	3/22	3/27	3/32
Operating time OPTILight, h	5.5	7	4
Charging time, h	2.5	3	3.5
Battery	3.7 V / 800 mAh Li-ion	3.7 V / 1010 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Verified no. of charging cycles	Min. 1000	Min. 1000	Min. 1000
Protection class	IP65	IP65	IP65
Rough service	Yes	Yes	Yes
Impact protection	IK07	IK07	IK07
Impact resistance	2 m	2 m	2 m
Cable	1 m USB-A to USB-C	1 m USB-A to USB-C	1 m USB-A to USB-C
Operating voltage AC	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A
Power consumption	1.1 W	1.2 W	3.2 W
Charger incl.	No	No	No
Operating temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	158 x 27 x 21 mm	126 x 60 x 23.5 mm	188 x 60 x 33 mm
Net weight	77 g	106 g	263 g
Price	€ 45.90	€ 56.90	€ 89.90



LEARN MORE ABOUT
FOR LIFE CONCEPT





Optional accessory for
03.5691 MAG PRO WIRELESS



MAG series

	A MAG PRO WIRELESS	A CHARGING PAD
Product number	03.5691	03.5928
Light source	COB LED Spot: High-power LED	-
Luminous flux, lumen	60-600 Spot: 150	-
Adjustable light output	Stepless	-
CRI	Ra > 80	-
CCT	6000 K	-
Operating time with max. lumen, h	1.5	-
Operating time with min. lumen, h	15	-
Charging time, h	USB: 4 h - Wireless: 7 h	-
Battery	3.7 V / 2600 mAh Li-ion	-
Protection class	IP54	IP30
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	1 m USB	USB (excl.)
Charger voltage	-	100-240 V AC 50/60 Hz
Charging voltage/current DC	5 V / 1 A	5 V / DC 1 A
Power consumption	Max 6.5 W	Max 5 W
Charger incl.	-	-
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	261 x 62 x 43 mm	183 x 84 x 13 mm
Net weight	339 g	115 g
Price	€ 74.90	€ 29.90

MAG PRO WIRELESS KIT

A	Product number	Price
	MAG PRO WIRELESS KIT 03.5691 MAG PRO WIRELESS 03.5928 CHARGING PAD	49.0515 € 104.80



LEARN MORE ABOUT
MAG PRO WIRELESS KIT



SLIM series

	A MINI SLIM	A SLIM
Product number	03.6210	03.6211
Light source	High-efficiency multi-LED design with 16 LEDs	High-efficiency multi-LED design with 20 LEDs
Luminous flux, lumen	20-200 Spot: 100	50-500 Spot: 150
OPTILight setting	500 lux@0.25 m	500 lux@0.5 m
Adjustable light output	3 levels	3 levels
Beam angle	110° Spot: 25°	110° Spot: 25°
CRI	Ra > 80	Ra > 80
CCT	5700 K	5700 K
Operating time max. / min. lumen, h	2 / 19	2.5 / 27
Operating time OPTILight, h	5.5	4
Charging time, h	2.5	3.5
Battery	3.7 V / 800 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Verified no. of charging cycles	Min. 1000	Min. 1000
Protection class	IP30	IP30
Rough service	-	-
Impact protection	IK07	IK07
Impact resistance	2 m	2 m
Cable	1 m USB-A to USB-C	1 m USB-A to USB-C
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A
Power consumption	1.4 W	3.5 W
Charger incl.	No	No
Operating temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	130 x 43 x 29 mm	166 x 46 x 29 mm
Net weight	97 g	205 g
Price	€ 62.90	€ 77.90

UNIFORM series

	 SUPERFORM	 UV-FORM
Product number	03.5406	03.5408
Light source	COB LED	COB LED Spot: High-power UV-light
Luminous flux, lumen	750	125-250 Spot: UV
Adjustable light output	-	2 levels
Beam angle	-	-
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	-	2.5
Operating time with min. lumen, h	-	5
Charging time, h	-	3
Battery	-	3.7 V / 1600 mAh Li-ion
Protection class	IP54	IP20
Impact protection	IK08	IK07
Impact resistance	1 m	1 m
Cable	5 m H05RN-F 2x1 mm ²	1 m USB
Operating voltage AC	100-240 V	-
Charging voltage/current DC	-	5 V / 1 A
Power consumption	Max 8 W	Max 3 W
Charger incl.	-	Country-specific
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	270 x 49 x 31 mm	155 x 60 x 32 mm
Net weight	710 g	156 g
Price	€ 61.90	€ 79.90

STICK LITE series

	 STICK LITE S	 STICK LITE M
Product number	03.5665	03.5666
Light source	COB LED	COB LED
Luminous flux, lumen	20-200 Spot: 50	40-400 Spot: 75
Adjustable light output	Stepless	Stepless
Beam angle	110°/35°	110°/35°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K / 6000 K
Operating time with max. lumen, h	2	2
Operating time with min. lumen, h	20	20
Charging time, h	2.5	3
Battery	3.7 V / 1200 mAh Li-ion	3.7 V / 1800 mAh Li-ion
Protection class	IP20	IP20
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A
Power consumption	Max 2.5 W	Max 4 W
Charger incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	150 x 34 x 13 mm	250 x 34 x 15 mm
Net weight	52 g	88 g
Price	€ 24.90	€ 34.90

	 STAR	 STAR LITE
Product number	03.5620	03.5671
Light source	COB LED	COB LED
Luminous flux, lumen	500-1000	-
Adjustable light output	2 levels	No
Beam angle	-	-
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	2.5	-
Operating time with min. lumen, h	5	-
Charging time, h	8	-
Battery	3.7 V / 5200 mAh Li-ion	-
Protection class	IP65	IP40
Impact protection	IK07	IK08
Impact resistance	1 m	1 m
Cable	1 m USB	5 m / 2 x 1.0 mm ² H05RN-F
Operating voltage AC	-	100-240 V
Charging voltage/current DC	5 V / 1 A	-
Power consumption	Max 8.5 W	Max 4.5 W
Charger incl.	Country-specific	-
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	156 x 103 x 98 mm	340 x 40 x 25 mm
Net weight	620 g	600 g
Price	€ 99.90	34.90

LINE LIGHT inspection

	A LINE LIGHT C+R	A LINE LIGHT R
Product number	03.5243	03.5244
Light source	36 SMD LEDs Spot: CREE XP-G2	20 SMD LEDs Spot: CREE XP-G2
Luminous flux, lumen	900 Spot: 150	600 Spot: 150
Illuminance, lux@0.5 m	1800 Spot: 1500	1200 Spot: 1500
Adjustable light output	-	-
Beam angle	75° Spot: 50°	75° Spot: 50°
CRI	Ra > 80	Ra > 80
CCT	6500 K	6500 K
Operating time with max. lumen, h	2.5 Spot: 8	1.5 Spot: 4
Operating time with min. lumen, h	-	-
Charging time, h	4	6
Battery	3.7 V / 5200 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP65	IP65
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	5 m / 2 x 1 mm ² H05RN-F	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	4.2 V / 3.5 A	5 V / 1 A
Power consumption	Max 8 W	Max 5.5 W
Charger incl.	Yes	Country-specific
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	ø25 x 461 mm	ø25 x 357 mm
Net weight	300 g	220 g
Price	€ 104.90	€ 92.90

BONNET LIGHTS

	A LINE LIGHT BONNET C+R	A NOVA BONNET
Product number	03.5240	03.5457
Light source	64 SMD LEDs	High-efficiency COB LED
Luminous flux, lumen	700-1400	200-2000
Illuminance, lux@0.5 m	1000-2000	-
Adjustable light output	2 levels	5 levels
Beam angle	75°	-
CRI	Ra > 80	Ra > 80
CCT	6500 K	6000 K
Operating time with max. lumen, h	1.5	2
Operating time with min. lumen, h	3	20
Charging time, h	4	5
Battery	3.7 V / 5200 mAh Li-ion	7.3 V / 4000 mAh Li-ion
Protection class	IP65	IP67
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	5 m / 2 x 1.0 mm ² H05RN-F	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	4.2 V / 3.5 A	5 V / 2 A
Power consumption	Max 13 W	Max 16 W
Charger incl.	Yes	Yes
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	ø25 x 1017 mm	1135 x 220 x 163 mm
Net weight	470 g (980 g incl. rack)	1.69 kg (NOVA R 790 g)
Price	€ 169.90	€ 149.90

Headlamps



	A ZONE 2	C ZOOM
Product number	03.5850	03.5627
Light source	COB LED	LED
Luminous flux, lumen	20/100/200 (Step 1/2/3)	10/80/220 (Step 1/2/3)
Adjustable light output	3 levels	3 levels
Beam angle	120° / 60°	10° / 60°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	2	4.5
Operating time with min. lumen, h	22	19
Charging time, h	2.5	2.5
Battery	3.7 V/1200 mAh Li-ion	3.7 V/2000 mAh Li-ion
Protection class	IP54	IP54
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A
Power consumption	Max 2.5 W	Max 5.5 W
Charger incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	84 x 31 x 37 mm	78 x 46.4 x 46.6 mm
Net weight	75 g	109 g
Price	€ 39.90	€ 29.90



	A I-VIEW
Product number	03.6212
Light source	High-efficiency multi-LED design with 12 LEDs
Luminous flux, lumen	40-400
OPTILight setting	500 lux@0.5 m
Adjustable light output	3 levels
Beam angle	120° x 60°
CRI	Ra > 80
CCT	5700 K
Operating time max. / min. lumen, h	2/21
Operating time OPTILight, h	4
Charging time, h	4.5
Battery	3.7 V / 1400 mAh Li-ion
Verified no. of charging cycles	Min. 1000
Protection class	IP65
Rough service	Yes
Impact protection	IK07
Impact resistance	2 m
Cable	1 m USB-A to USB-C
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	2.6 W
Charger incl.	No
Operating temperature	-10 to +40 °C
Dimensions	99 x 50 x 40 mm
Net weight	130 g
Price	€ 71.90



ACCESSORIES

		Product number	Price
	HARD HAT BRACKET For 03.6212 I-VIEW 103 x 33,5 x 28 mm 22 g	03.5797	€ 14.90
	ADHESIVE MOUNTING BASES For 03.5797 HARD HAT BRACKET	03.5798	€ 7.90

HEAD LITE series



	HEAD LITE S	HEAD LITE A	HEAD LITE
Product number	03.5645	03.5670	03.5669
Light source	COB LED	COB LED	COB LED Spot: 1 SMD LED
Luminous flux, lumen	100	15-150	15-150 Spot: 75
Adjustable light output	Stepless	Stepless	Stepless
Beam angle	110°	120°/100°	120°/100° Spot: 15°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K / 6000 K
Operating time with max. lumen, h	1	6	1.5
Operating time with min. lumen, h	10	60	15
Charging time, h	-	-	3
Battery	Excl. (use 2 x AAA / 1.5V Alkaline)	3 x AAA / 1.5V Alkaline	3.7V / 800 mAh Li-ion
Protection class	IP30	IP54	IP54
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Cable	-	-	1 m USB
Operating voltage AC	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A
Power consumption	Max 1.5 W	Max 2 W	Max 2 W
Charger incl.	-	-	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	55 x 32.5 x 22 mm	70 x 35 x 40 mm	74 x 41 x 41 mm
Net weight	65 g	100 g	73 g
Price	€ 14.90	€ 21.90	€ 32.90

Lighting to wear



	FLEX WEAR
Product number	03.5810
Light source	COB LED / LED
Luminous flux, lumen	75/150 (Step 1/2) Spot: 100
Adjustable light output	2 levels
Beam angle	110° / 14°
CRI	Ra > 80
CCT	6000 K
Operating time with max. lumen, h	2
Operating time with min. lumen, h	4
Charging time, h	2.5
Battery	3.7 V / 800 mAh Li-ion
Protection class	IP20
Impact protection	IK07
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 1.5 W
Charger incl.	No
Temperature	-10 to +40 °C
Dimensions	89 x 26 x 21 mm
Net weight	42 g
Price	€ 30.90



FLEX WEAR KIT

	Product number	Price
FLEX WEAR KIT: FLEX WEAR including headband and cap mount	03.5811	€ 41.90

NOVA rechargeable series



	A NOVA MINI	A NOVA R	B NOVA 4 C+R	B NOVA 6 C+R
Product number	03.6200	03.6201	03.6204	03.6205
Light source	High-efficiency multi-LED design with 26 LEDs	High-efficiency multi-LED design with 44 LEDs	High-efficiency multi-LED design with 90 LEDs	High-efficiency multi-LED design with 120 LEDs
Luminous flux, lumen	100-1000	200-2000	400-4000	600-6000
OPTILight setting	500 lux@0.5 m	500 lux@1 m	200 lux@2 m	200 lux@2 m
Adjustable light output	6 levels	6 levels	6 levels	6 levels
Beam angle	100°	110°	110°	110°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	5700 K	5700 K	5700 K	5700 K
Operating time max. / min. lumen, h	1.5/18	1.5/17	2/18	1.5/15
Operating time OPTILight, h	6	3	3.5	4.5
Charging time, h	4	5.5	3	3.5
Battery	3.6 V / 3200 mAh Li-ion	7.2 V / 3200 mAh Li-ion	18.5 V / 2600 mAh Li-ion	18 V / 3200 mAh Li-ion
Verified no. of charging cycles	Min. 1000	Min. 1000	Min. 1000	Min. 1000
Protection class	IP65	IP67	IP67	IP67
Rough service	Yes	Yes	Yes	Yes
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	2 m	2 m	2 m	2 m
Cable	1 m USB-A to USB-C	1 m USB-A to USB-C	5 m / 2 x 0.75 mm² H05RN-F	5 m / 2 x 0.75 mm² H05RN-F
Operating voltage AC	-	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	24 V / 1.5 A	24 V / 2 A
Power consumption	7.3 W	14 W	25 W	37 W
Charger incl.	No	No	Yes	Yes
Operating temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	102 x 39 x 94 mm	166 x 60 x 167 mm	235 x 82 x 235 mm	273 x 88 x 270 mm
Net weight	278 g	840 g	1.98 kg	2.58 kg
Price	€ 74.90	€ 104.90	€ 214.90	€ 254.90

NOVA cable series



	B NOVA 4	B NOVA 6	B NOVA 12
Product number	03.6202	03.6203	03.6206
Light source	High-efficiency multi-LED design with 90 LEDs	High-efficiency multi-LED design with 120 LEDs	High-efficiency multi-LED design with 200 LEDs
Luminous flux, lumen	400-4000	600-6000	1200-12000
OPTILight setting	200 lux@2 m	200 lux@2 m	200 lux@4 m
Adjustable light output	6 levels	6 levels	6 levels
Beam angle	110°	110°	110°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	5700 K	5700 K	5700 K
Operating time max. / min. lumen, h	-	-	-
Operating time OPTILight, h	-	-	-
Battery	-	-	-
Protection class	IP67	IP67	IP67
Rough service	Yes	Yes	Yes
Impact protection	IK07	IK07	IK07
Impact resistance	2 m	2 m	2 m
Cable	5 m / H07RN-F 3G1.0 mm²	5 m / H07RN-F 3G1.0 mm²	5 m / H07RN-F 3G1.0 mm²
Operating voltage AC	100-240 V	100-240 V	100-240 V
Charging voltage/current DC	-	-	-
Power consumption	29 W	41 W	81 W
Charger incl.	-	-	-
Operating temperature	-25 to +40 °C	-25 to +40 °C	-25 to +40 °C
Dimensions	235 x 80 x 235 mm	273 x 87 x 270 mm	310 x 105 x 305 mm
Net weight	2.42 kg	3.04 kg	4.62 kg
Price	€ 134.90	€ 154.90	€ 284.90

VEGA LITE series



	 VEGA LITE C+R	 VEGA LITE COMPACT	 VEGA LITE	 VEGA LITE COLOUR
Product number	03.5451	03.5673	03.5453	03.5459
Light source	66 SMD LEDs	83 SMD LEDs	123 SMD LEDs	123 SMD LEDs
Luminous flux, lumen	1250-2500	4000	6000	5000
Adjustable light output	2 levels	-	-	-
Beam angle	100°	100°	100°	100°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	2500 K - 4500 K - 6500 K
Operating time with max. lumen, h	1.5	-	-	-
Operating time with min. lumen, h	3	-	-	-
Charging time, h	1.5	-	-	-
Battery	11.1V / 2600 mAh Li-ion	7.3 V / 4000 mAh Li-ion	-	-
Protection class	IP54	IP54	IP54	IP54
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	-	-	-	-
Cable	5 m / 2 x 0.75 mm² H05RN-F	3 m / 3 x 1.5 mm² H05RN-F	5 m / 3 x 1.5 mm² H07RN-F	5 m / 3x1.5 mm² H07RN-F
Operating voltage AC	100-240 V	100-240 V	100-240 V	100-240 V
Charging voltage/current DC	12.6V / 2.4 A	-	-	-
Power consumption	Max 18 W	Max 32 W	Max 45 W	Max 45 W
Charger incl.	Yes	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	288 x 103 x 280 mm	288 x 103 x 280 mm	318 x 117 x 310 mm	318 x 117 x 310 mm
Net weight	2.59 kg	2.46 kg	3.43 kg	3.50 kg
Price	€ 134.90	€ 134.90	€ 154.90	€ 179.90

AREA LITE 360°



	 AREA LITE CO
Product number	03.5637
Light source	168 SMD LEDs
Luminous flux, lumen	6000
Adjustable light output	-
Beam angle	360°
CRI	Ra > 80
CCT	6000K
Operating time with max. lumen, h	-
Operating time with min. lumen, h	-
Charging time, h	-
Battery	-
Protection class	IP54
Impact protection	IK07
Impact resistance	1 m
Cable	5 m / 3 x 1.5 mm² H07RN-F
Operating voltage AC	220-240 V
Charging voltage/current DC	-
Power consumption	Max 45 W
Charger incl.	-
Temperature	-10 to +30 °C
Dimensions	305 x 199 mm
Net weight	2.95 kg
Price	€ 164.90



LEARN MORE ABOUT
VEGA LITE COLOUR

SITE LIGHT series



	E SITE LIGHT 40	E SITE LIGHT 80
Product number	03.5268	03.5269
Light source	432 SMD LEDs	864 SMD LEDs
Luminous flux, lumen	10000-40000	20000-80000
Adjustable light output	4 levels	4 levels
Beam angle	120°	120°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	-	-
Operating time with min. lumen, h	-	-
Charging time, h	-	-
Battery	-	-
Protection class	IP65	IP65
Impact protection	IK08	IK08
Impact resistance	1 m	1 m
Cable	10 m / 3 x 1 mm ² H07RN-F	10 m / 3 x 1 mm ² H07RN-F
Operating voltage AC	220-240 V	220-240 V
Charging voltage/current DC	-	-
Power consumption	Max 315 W	Max 630 W
Charger incl.	-	-
Temperature	-25 to +40 °C	-25 to +40 °C
Dimensions	278 x 241 x 160 mm	415 x 241 x 160 mm
Net weight	4.95 kg	6.70 kg
Price	€ 669.90	€ 1069.90

E ROPE LIGHT
03.5815
120 SMD LEDs /m
20000
-
120°
Ra > 80
6000 K
-
-
-
IP65
IK07
1 m
1.5 m / 2 x 1.0 mm ² H05RN-F
220-240 V
-
Max 205 W
-
-20 to +40 °C
ø200 x 325 mm
4.68 kg
€ 399.90



LEARN MORE
ABOUT ROPE LIGHT

C ACCESSORIES	Product number	Price
	SCANGRIP TRIPOD 4.5m Air cushioned tripod for positioning of SITE LIGHTs, 2.2 - 4.5 m 17 kg Max load 20 kg	03.5270 € 314.90
	DUAL BRACKET for 4.5m TRIPOD For positioning of two SITE LIGHTs	03.5758 € 59.90
	TRANSPORT CASE SITE LIGHT 80	49.0351 € 171.90
	TRANSPORT CASE SITE LIGHT 40 The transport cases enable you to safely transport your SITE LIGHT work light to the building site. They are sturdy and high-quality cases that can withstand shocks and rough handling during transport.	49.0350 € 96.90

Go to scangrip.com to see other accessories available



LEARN MORE
ABOUT SITE LIGHT

MINI LITE A

LITE

C MINI LITE A	
Product number	03.5102
Light source	LG
Luminous flux, lumen	100
Adjustable light output	-
Beam angle	10°
Beam distance	Up to 80 m
CRI	Ra > 75
CCT	6000 K
Operating time with max. lumen, h	4.5
Operating time with min. lumen, h	-
Charging time, h	-
Battery	3 x AAA / 1.5V Alkaline
Protection class	IP54
Impact resistance	1 m
Cable	-
Operating voltage AC	-
Charging voltage/current DC	-
Power consumption	Max 2 W
Charger incl.	-
Temperature	-10 to +40 °C
Dimensions	ø28 x 102 mm
Net weight	72 g
Price	€ 8.90

FLASH series



	FLASH PENCIL	FLASH PEN	FLASH 300	FLASH 600	FLASH MICRO R
Product number	03.5130	03.5131	03.5132	03.5133	03.5113
Light source	LUMILEDS	CREE	CREE	CREE	LED
Luminous flux, lumen	75	100-200	150-300	300-600	7.5-75
Adjustable light output	-	BOOST mode	BOOST mode	BOOST mode	Stepless
Beam angle	15°	10°-60°	10°-60°	10°-60°	110°
Beam distance	40 m	80 m	100 m	150 m	10 m
CRI	Ra > 70	Ra > 70	Ra > 65	Ra > 65	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2.5	3.5	3	2	0.25
Operating time with min. lumen, h	-	-	-	-	2.5
Charging time, h	-	-	-	-	2.5
Battery	2 x AAAA / 1.5 V Alkaline	2 x AAA / 1.5 V Alkaline	3 x AAA / 1.5 V Alkaline	2 x C / 1.5 V Alkaline	3.7 V / 100 mAh Li-ion
Protection class	IP54	IP54	IP54	IP54	IP20
Impact protection	IK07	IK07	IK07	IK07	-
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	-	-	-	-	USB cable
Charging voltage/current DC	-	-	-	-	-
Power consumption	Max 1.6 W	Max 1.2 W	Max 4.8 W	Max 7 W	Max 1.2 W
Charger incl.	-	-	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø15 x 131 mm	ø20 x 153 mm	ø32 x 133 mm	ø36 x 174 mm	55 x 15 x 25 mm
Net weight	32 g	62 g	122 g	292 g	17 g
Price	€ 19.90	€ 27.90	€ 34.90	€ 44.90	€ 14.90

FLASH R series



	FLASH 12-24V	WORK PEN 200 R	FLASH PEN R	FLASH 600 R	FLASH 1000 R
Product number	03.5124	03.5127	03.5136	03.5137	03.5138
Light source	SAMSUNG LED	COB LED / CREE	CREE	CREE	CREE
Luminous flux, lumen	130	20-200 Spot: 150	150-300	300-600	500-1000
Adjustable light output	-	Stepless	BOOST mode	BOOST mode	BOOST mode
Beam angle	10°-70°	105° / 20°	10°-60°	10°-70°	10°-60°
Beam distance	100 m	40 m	100 m	150 m	250 m
CRI	Ra > 70	Ra > 80	Ra > 65	Ra > 65	Ra > 70
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	1	1	7	7	5
Operating time with min. lumen, h	-	10	-	-	-
Charging time, h	2	2.5	3	4	4
Battery	3.7 V / 550 mAh Li-ion	3.7 V / 750 mAh Li-ion	3.7 V / 1100 mAh Li-ion	3.7 V / 2600 mAh Li-ion	3.7 V / 4000 mAh Li-ion
Protection class	IP30	IP30	IP54	IP54	IP54
Impact protection	IK07	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	Cigarette Plug Connector	1 m USB	1 m USB	1 m USB	1 m USB
Charging voltage/current DC	10-28 V	5 V / 1 A	5 V / 1 A	5 V / 1 A	5 V / 2 A
Power consumption	Max 2 W	4 W	4 W	6 W	12 W
Charger incl.	No	No	No	No	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø30 x 105 mm	ø21 x 172 mm	ø24 x 169 mm	ø38 x 185 mm	ø42 x 196 mm
Net weight	88 g (100 g with cover)	54 g	83 g	253 g	345 g
Price	€ 29.90	€ 29.90	€ 39.90	€ 59.90	€ 69.90

LINE LIGHT series



	A LINE LIGHT 2-POST	A LINE LIGHT 1	A LINE LIGHT 2	A LINE LIGHT 4	A LINE LIGHT 6
Product number	03.5225	03.5203	03.5202	03.5201	03.5200
Light source	2 x 96 SMD LEDs	216 SMD LEDs	2 x 156 SMD LEDs	4 x 216 SMD LEDs	6 x 216 SMD LEDs
Luminous flux, lumen	2 x 12.5-1250	2750	2 x 2000	4 x 2750	6 x 2750
Illuminance, lux@0.5 m	2 x 20-2000	3000	2 x 2800	4 x 27.5-2750	6 x 3000
Adjustable light output	Stepless	-	-	Stepless	-
Beam angle	75°	75°	75°	75°	75°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	-	-	-	-
Operating time with min. lumen, h	-	-	-	-	-
Charging time, h	-	-	-	-	-
Battery	-	-	-	-	-
Protection class	IP67	IP67	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	8 m / H03VV-F 2 x 0.5 mm²	8 m / H03VV-F 2 x 0.5 mm²	8 m / H03VV-F 2 x 0.5 mm²	8 m / H03VV-F 2 x 0.5 mm²	8 m / H03VV-F 2 x 0.5 mm²
Operating voltage AC	-	-	-	-	-
Charging voltage/current DC	24 V	24 V	24 V	24 V	24 V
Power consumption	Max 2 x 24 W	Max 26 W	38 W	104 W	156 W
Power supply incl.	25 W POWER SUPPLY UNIT 03.5229	25 W POWER SUPPLY UNIT 03.5229	80 W POWER SUPPLY UNIT 03.5226	100 W POWER SUPPLY UNIT 03.5226	2 x 80 W POWER SUPPLY UNIT 03.5226
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	2 x ø25 x 770 mm	ø25 x 1630 mm	2 x ø25 x 1234 mm	4 x ø25 x 1630 mm	6 x ø25 x 1630 mm
Net weight*	4.1 kg	2.03 kg	4.52 kg	6.7 kg	10.24 kg
Price	€ 403.90	€ 241.90	€ 393.90	€ 1009.90	€ 1514.90

*Weight includes all parts and accessories included

LINE LIGHT series



	A LINE LIGHT 75	A LINE LIGHT 120	A LINE LIGHT 160	A LINE LIGHT 200
Product number	03.5221	03.5222	03.5223	03.5224
Light source	96 SMD LEDs	156 SMD LEDs	216 SMD LEDs	276 SMD LEDs
Luminous flux, lumen	1250	2000	2750	3500
Illuminance, lux@0.5 m	2000	2800	3000	3200
Adjustable light output	-	-	-	-
Beam angle	75°	75°	75°	75°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	-	-	-
Operating time with min. lumen, h	-	-	-	-
Charging time, h	-	-	-	-
Battery	-	-	-	-
Protection class	IP67	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	-	-	-	-
Operating voltage AC	-	-	-	-
Charging voltage/current DC	24 V	24 V	24 V	24 V
Power consumption	Max 10 W	Max 16 W	Max 22 W	Max 28 W
Power supply incl.	-	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø25 x 838 mm	ø25 x 1234 mm	ø25 x 1630 mm	ø25 x 2027 mm
Net weight*	390 g	530 g	670 g	860 g
Price	€ 120.90	€ 201.90	€ 231.90	€ 272.90

LINE LIGHT accessories

Combine LINE LIGHT lighting units with power supply, cable and suitable suspensions.
A range of flexible suspensions makes it possible to position the lighting units exactly where you need it.

POWER SUPPLY/CABLE		Product number	Price
	A LINE LIGHT DIMMER	03.5264	€ 70.90
2 m cable  5 m cable	A 25 W power supply unit	03.5229	€ 31.50
2 m cable  5 m cable	A 80 W power supply unit	03.5226	€ 51.90
2 m cable  5 m cable	A 200 W power supply unit	03.5277	€ 74.90
	C POWER CABLE 8 m	03.5215	€ 8.50

SUSPENSIONS		Product number	Price
	C CLIP - 1 pc. - incl. fittings for suspension	03.5214	€ 6.70
	C CLIP - 1 pc. - incl. fittings for suspension	03.5216	€ 23.90
	C CLIP with ø30 mm magnet for suspension	03.5279	€ 20.90
	C LARGE MAGNET - ø60 mm with clip	03.5276	€ 26.90
	C FLEXIBLE MAGNET SUSPENSION - Ball socket joint with strong magnet for suspension for LINE LIGHT 2-POST	03.5257	€ 42.90
	C MAGNET - With small clip - ø30 mm	03.5246	€ 15.90
	C CLIP - Small metal clip	03.5213	€ 4.20
	C GOOSENECK - 20 cm flexible arm with clip holder and ø60 mm suction cup	03.5219	€ 26.90
	C GOOSENECK - 20 cm flexible arm with clip holder and ø60 mm magnet	03.5218	€ 31.90
	C HOOK - Adjustable hook with clip holder and magnet	03.5312	€ 11.90

Go to scangrip.com to see other accessories available



One lighting solution for all battery packs

JUST CONNECT

Compatible with AEG - AMPSHARE - BERNER - BOSCH - BOSCH GREEN - DEWALT - EINHELL - FEIN - FESTOOL - FLEX

HAZET - HIKOKI - HILTI - INGERSOLL - MAKITA - METABO - MILWAUKEE - PANASONIC - RIDGID - RUPES - SNAP-ON - WÜRTH



NOVA CONNECT series

	 NOVA 2 CONNECT	 NOVA 4 CONNECT	 NOVA 10 CONNECT
Product number	03.6100C	03.6101C	03.6102C
Light source	High-efficiency COB LED	High-efficiency COB LED	High-efficiency COB LED
Luminous flux, lumen	200-2000	400-4000	1000-10000
Adjustable light output	5 levels	5 levels	5 levels
Beam angle	100°	110°	110°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	5.75@18 V 5.2 Ah battery	3@18 V 5.2 Ah battery	1.25@18 V 5.2 Ah battery
Operating time with min. lumen, h	58@18 V 5.2 Ah battery	31@18 V 5.2 Ah battery	12@18 V 5.2 Ah battery
Operating time: backup battery, h	-	2.5@10% / 400 lm	1@10% / 1000 lm
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30	IP65	IP65
Impact protection	IK07	IK07 with battery cover	IK07 with battery cover
Impact resistance	1 m	1 m	1 m
Charger input voltage	-	-	-
Power consumption	Max 16 W	Max 30 W	Max 75 W
Battery incl.	No	No	No
Charger incl.	No	No	No
Power supply Incl.	No	No	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	161 x 164 x 78 mm	263 x 230 x 119 mm	304 x 292 x 131 mm
Net weight	720 g	2.36 kg	3.72 kg
Price	€ 99.90	€ 189.90	€ 299.90

VEGA CONNECT series



	 VEGA 2 CONNECT	 VEGA 4 CONNECT
Product number	03.6106C	03.6104C
Light source	60 LEDs	105 LEDs
Luminous flux, lumen	1000 / 2000 (step 1 / 2)	2000 / 4000 (step 1 / 2)
Adjustable light output	2 levels	2 levels
Beam angle	100°	100°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	4.5@18 V 5.2 Ah battery	2.25@18 V 5.2 Ah battery
Operating time with min. lumen, h	9@18 V 5.2 Ah battery	4.5@18 V 5.2 Ah battery
Operating time: backup battery, h	-	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP54 with power supply IP30 with battery	IP54 with power supply IP30 with battery
Impact protection	IK06	IK07
Impact resistance	1 m	1 m
Charger input voltage	-	-
Power consumption	Max 20W	Max 40 W
Battery incl.	No	No
Charger incl.	No	No
Power supply incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	200 x 208 x 78 mm	280 x 289 x 103 mm
Net weight	850 g	2.02 kg
Price	€ 84.90	€ 134.90

Use your 18 V/20 V battery pack
for SCANGRIP CONNECT work lights

JUST CONNECT

Add the connector matching
your 18 V/20 V battery pack



FOR MORE
INFORMATION
ON THE CONNECT
PRODUCT RANGE
AT SCANGRIP.COM

AREA CONNECT series



	 AREA 10 CONNECT	 AREA 6 CONNECT
Product number	03.6103C	03.6108C
Light source	240 LEDs	160 LEDs
Luminous flux, lumen	360°: 1000-10000 / 180°: 500-5000	3000 / 6000 (step 1 / 2)
Adjustable light output	5 levels	2 levels
Beam angle	360° / 180°	360°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	1@18 V 5.2 Ah battery	1.75@18 V 5.2 Ah battery
Operating time with min. lumen, h	22@18 V 5.2 Ah battery	6.5@18 V 5.2 Ah battery
Operating time: backup battery, h	50min@10 % / 1000 lm	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP65 IP54 with battery cover	IP54 with power supply IP30 with battery
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Charger input voltage	-	-
Power consumption	Max 84 W	Max 54 W
Battery incl.	No	No
Charger incl.	No	No
Power supply incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	395 x 200 x 212 mm	ø195 x 363 mm
Net weight	3.7 kg	1.97 kg
Price	€ 304.90	€ 179.90

D BASIC CONNECT	
	03.6109C
	30 LEDs
	500 / 1000 (step 1 / 2)
	2 levels
	110°
	Ra > 80
	6000 K
	9@18 V 5.2 Ah battery
	18@18 V 5.2 Ah battery
	-
	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
	IP30
	IK07
	1 m
	-
	Max 10.5 W
	No
	No
	No
	-10 to +40 °C
	158 x 79 x 62 mm
	340 g
€ 59.90	

MULTILIGHT CONNECT series



D	MULTILIGHT SEARCH CONNECT	MULTILIGHT FLEX CONNECT	MULTILIGHT FLOOD CONNECT
Product number	03.5695C	03.5693C	03.5694C
Light source	High-power LED	High-efficiency COB LED	High-efficiency COB LED
Luminous flux, lumen	300-600	375-750	750-1500
Adjustable light output	2 levels	2 levels	2 levels
Beam angle	10° - 70°	110°	110°
CRI	Ra > 70	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	12@18 V 5.2 Ah battery	12.5@18 V 5.2 Ah battery	6.5@18 V 5.2 Ah battery
Operating time with min. lumen, h	24@18 V 5.2 Ah battery	26@18 V 5.2 Ah battery	13@18 V 5.2 Ah battery
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR		
Protection class	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Charger input voltage	-	-	-
Power consumption	Max 8 W	Max 7.5 W	Max 14.5 W
Battery incl.	No	No	No
Charger incl.	No	No	No
Power supply Incl.	No	No	No
Max Load	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	186 x 79 x 203 mm	168 x 79 x 203 mm	145 x 116 x 197 mm
Net weight	466 g	376 g	611 g
Price	€ 89.90	€ 89.90	€ 94.90



D	SEARCH HEAD CONNECT	FLEX HEAD CONNECT	FLOOD HEAD CONNECT	AREA HEAD CONNECT
Product number	03.5699C	03.5697C	03.5698C	03.5701C
Light source	High-power LED	High-efficiency COB LED	High-efficiency COB LED	60 LEDs
Luminous flux, lumen	300-600	375-750	750-1500	1250-2500
Adjustable light output	2 levels	2 levels	2 levels	2 levels
Beam angle	10° - 70°	110°	110°	170° - 360°
CRI	Ra > 70	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	12@18 V 5.2 Ah battery	12.5@18 V 5.2 Ah battery	6.5@18 V 5.2 Ah battery	4.5@18 V 5.2 Ah battery
Operating time with min. lumen, h	24@18 V 5.2 Ah battery	26@18 V 5.2 Ah battery	13@18 V 5.2 Ah battery	9@18 V 5.2 Ah battery
Operating time: backup battery, h	-	-	-	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR			
Protection class	IP30	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Charger input voltage	-	-	-	-
Power consumption	Max 8 W	Max 7.5 W	Max 14.5 W	Max. 22 W
Battery incl.	No	No	No	No
Charger incl.	No	No	No	No
Power supply Incl.	No	No	No	No
Max load	-	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	92 x 49 x 49 mm	244 x 41 x 41 mm	57 x 116 x 106 mm	ø 111 x 173 mm
Net weight	195 g	105 g	340 g	520 g
Price	€ 44.90	€ 44.90	€ 49.90	€ 69.90



D	MULTILIGHT BODY CONNECT
Product number	03.5696C
Light source	-
LED performance, lumen/W	-
Luminous flux, lumen	-
Adjustable light output	2 levels
Beam angle	-
CRI	-
CCT	-
Operating time with max. lumen, h	-
Operating time with min. lumen, h	-
Operating time: backup battery, h	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30
Impact protection	IK07
Impact resistance	1 m
Charger input voltage	-
Power consumption	-
Battery incl.	No
Charger incl.	No
Power supply Incl.	No
Max load	90 W
Temperature	-10 to +40 °C
Dimensions	114 x 202 x 78 mm
Net weight	271 g
Price	€ 54.90

MULTILIGHT CONNECT

New flexible concept of hand-held work light with multiple, exchangeable light heads

03.5696C 	03.5699C 	03.5697C 	03.5698C 	03.5701C
03.5695C 	03.5693C 	03.5694C 	SEE VIDEO 	

Learn more about MULTILIGHT product range at scangrip.com

MULTILIGHT CASE & KIT

		Product number	Price
Net		MULTILIGHT CASE For safe transport and storage of the MULTILIGHT range	49.0511 € 59,90
Net		MULTILIGHT KIT includes: 03.5696C MULTILIGHT BODY CONNECT 03.5697C FLEX HEAD CONNECT 03.5698C FLOOD HEAD CONNECT 03.5699C SEARCH HEAD CONNECT 03.5701C AREA HEAD CONNECT 49.0511 MULTILIGHT CASE	49.0518 € 179,90



DUO / TOWER CONNECT

D	DUO CONNECT
Product number	03.6111C
Light source	2 x 40 LEDs
Luminous flux, lumen	1250 / 2500 (step 1 / 2)
Adjustable light output	2 levels
Beam angle	180°
CRI	Ra > 80
CCT	6000 K
Operating time with max. lumen, h	4.5@18 V 5.2 Ah battery
Operating time with min. lumen, h	9.5@18 V 5.2 Ah battery
Operating time: backup battery, h	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30
Impact protection	IK07
Impact resistance	1 m
Charger input voltage	-
Power consumption	Max 19.5 W
Battery incl.	No
Charger incl.	No
Power supply incl.	No
Temperature	-10 to +40 °C
Dimensions	224 x 78 x 91 mm
Net weight	620 g
Price	€ 79.90

D	TOWER COMPACT CONNECT
Product number	03.6110C
Light source	2 x 40 LEDs
Luminous flux, lumen	1250 / 2500 (step 1 / 2)
Adjustable light output	2 levels
Beam angle	180°
CRI	Ra > 80
CCT	6000 K
Operating time with max. lumen, h	4.5@18V 5.2 Ah battery
Operating time with min. lumen, h	9.5@18V 5.2 Ah battery
Operating time: backup battery, h	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30
Impact protection	IK07
Impact resistance	1 m
Charger input voltage	-
Power consumption	Max 19.5 W
Battery incl.	No
Charger incl.	No
Power supply incl.	No
Temperature	-10° to +40°C
Dimensions	956 x 78 x 91mm
Net weight	2.74 kg (incl. stand)
Price	€ 169.90

D	TOWER 5 CONNECT
Product number	03.6105C
Light source	120 LEDs
Luminous flux, lumen	2500 / 5000 (step 1 / 2)
Adjustable light output	2 levels
Beam angle	110°
CRI	Ra > 80
CCT	6000 K
Operating time with max. lumen, h	2@18 V 5.2 Ah battery
Operating time with min. lumen, h	4.5@18 V 5.2 Ah battery
Operating time: backup battery, h	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30
Impact protection	IK07
Impact resistance	1 m
Charger input voltage	-
Power consumption	Max 45 W
Battery incl.	No
Charger incl.	No
Power supply incl.	No
Temperature	-10 to +40 °C
Dimensions	121 x 153 x 892 mm
Net weight	5.2 kg
Price	€ 259.90

CONNECTORS

SCANGRIP CONNECTors for 18 V/20 V battery packs		Price
AEG	03.6158C	€ 9.90
BERNER	03.6155C	€ 9.90
BOSCH / AMPSHARE	03.6140C	€ 9.90
BOSCH GREEN	03.6141C	€ 9.90
DEWALT	03.6142C	€ 9.90
EINHELL	03.6143C	€ 9.90
FEIN	03.6144C	€ 9.90
FESTOOL	03.6153C	€ 9.90
FLEX	03.6145C	€ 9.90
HAZET	03.6146C	€ 9.90
HIKOKI	03.6147C	€ 9.90
HILTI*	03.6157C	€ 24.90
INGERSOLL	03.6152C	€ 9.90
MAKITA	03.6148C	€ 9.90
MILWAUKEE	03.6149C	€ 9.90
PANASONIC	03.6156C	€ 9.90
RIDGID	03.6154C	€ 9.90
RUPES	03.6159C	€ 9.90
SNAP-ON	03.6151C	€ 9.90
WÜRTH	03.6150C	€ 9.90

*21.6 V



BATTERY SAFETY SYSTEM

- Automatic discharge protection
- Overload protection
- Temperature surveillance
- Protected by design patent
- Approved by TÜV Rheinland



Scan QR code to
see TÜV Rheinland
test report

Accessories

CONNECT POWER SUPPLY		CAS BATTERY 18V Li-POWER 5.2 Ah	CAS BATTERY 18V Li-POWER 2.0 Ah	CAS CHARGER SC30
Product number	03.6123C	03.6121	03.6124	03.6122
Battery	-	18 V 5.2 Ah Li-power	18 V 2.0 Ah Li-power	-
Cable	5m / 2 x 0.75 mm ² H05RN-F	-	-	1.35 m / 2 x 0.75mm ² H03V VH2-F
Charger input voltage	100-240V AC 50/60 Hz	-	-	220-240V AC 50/60 Hz
Max load	Max 90 W	-	-	Max 30 W
Protection class	IP65	IP20	IP20	IP20
Impact protection	IK07	-	-	-
Impact resistance	1 m	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	124 x 83 x 72 mm	121 x 81 x 66 mm	111 x 79 x 42 mm	152 x 142 x 76 mm
Net weight	1 kg	670 g	430 g	440 g
Compatibility	SCANGRIP CONNECT work lights	-	-	12 V-18 V CAS battery
Price	€ 84.90	€ 119.90	€ 59.90	€ 54.90

BATTERY PACK KIT

	Product number	Price
	BATTERY PACK KIT 03.6121C BATTERY 5.2 Ah 03.612 CAS CHARGER	49.0584 € 159.90



NOVA 10 CONNECT 10.8V/14.4V/18V max MAX 75W
034102C
18 -10° to +40°C
SCANGRIP A/S
RYTTERHAVEN 9
DK-5700 SVENDSBORG



EU DESIGN PATENT NO. 212346
212127 IP65 IK07

Penlights



	CM MATCH PEN	CM MATCH PEN R
Product number	03.5117	03.5122
Light source	Ultra-high CRI LED	Ultra-high CRI LED
Luminous flux, lumen	100	100
Adjustable light output	-	-
Beam angle	10°-70°	10°-45°
Beam distance	Up to 75 m	Up to 95 m
CRI	Ra > 95	Ra > 92
CCT	4500 K	4500-6500 K
Adjustable CCT	-	2 steps
Operating time with max. lumen, h	2	2.5
Operating time with min. lumen, h	-	-
Charging time, h	-	2.5
Battery	2 x AAA / 1.5 V Alkaline	3.7 V / 1100 mAh Li-ion
Protection class	IP54	IP30
Impact resistance	1 m	1 m
Cable	-	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	-	5 V / 1 A
Power consumption	3 W	Max 2.5 W
Charger incl.	-	Yes
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	ø16 x 148 mm	ø19 x 159 mm
Net weight	60 g	88 g
Price	€ 42.90	€ 54.90

SCANGRIP flashlights are tested according to the ANSI/NEMA FL1 standard

Headlamp



	CM I-MATCH 3
Product number	03.5656
Light source	Ultra-high CRI+ COB LED
Luminous flux, lumen	25-250
Adjustable light output	Stepless
Beam angle	120°-60°
Beam distance	-
CRI	Ra > 96 CRI+
CCT	4500-6500 K
Adjustable CCT	5 steps
Operating time with max. lumen, h	1.5
Operating time with min. lumen, h	15
Charging time, h	3.5
Battery	3.8 V / 1600 mAh Li-poly
Protection class	IP65 / IK07
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 2.5 W
Charger incl.	No
Temperature	-10 to +40 °C
Dimensions	100 x 38 x 50 mm
Net weight	100 g
Price	€ 84.90

Handlamps



	CM MINIMATCH	CM SUNMATCH 4
Product number	03.5650	03.5657
Light source	Ultra-high CRI+ COB LED	Ultra-high CRI+ COB LED
Luminous flux, lumen	100-200	50-500 Spot: 200
Adjustable light output	2 levels	Stepless
Beam angle	75°	80° Spot: 20°
CRI	Ra > 96 CRI+	Ra > 96 CRI+ Spot: 95
CCT	4500-6500 K	2500-6500 K Spot: 4000 K
Adjustable CCT	2 steps	Stepless
Operating time with max. lumen, h	2	2
Operating time with min. lumen, h	4	10
Charging time, h	4	4
Battery	3.7 V / 1600 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP65	IP65 / IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A
Power consumption	Max 3.5 W	Max 8 W
Charger incl.	Yes	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	156 x 60 x 38 mm	188 x 58 x 26 mm
Net weight	190 g	267 g
Price	€ 94.90	€ 139.90



Universal headlamp



	CM UNIMATCH
Product number	03.5659
Light source	Ultra-high CRI+ COB LED
Luminous flux, lumen	75-150 Spot: 75
Adjustable light output	2 levels
Beam angle	115° Spot: 20°
CRI	Ra > 96 CRI+ Spot: 96 CRI+
CCT	2500-6500 K Spot: 4500 K
Adjustable CCT	Stepless
Operating time with max. lumen, h	1.75
Operating time with min. lumen, h	3.5
Charging time, h	2.5
Battery	3.7 V / 800 mAh Li-ion
Protection class	IP20
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 1.7 W
Charger incl.	No
Temperature	-10 to +40 °C
Dimensions	95 x 21 x 26.5 mm
Net weight	50 g
Price	€ 74.90

Kit in bag

CM ESSENTIAL	
Product number	49.0220
Content	I-MATCH 3 MINIMATCH MULTIMATCH R
Dimensions	290 x 100 x 190 mm
Net weight	1.755 kg
Price	€ 319.90



C ACCESSORY	Product number	Price
	SCANGRIP DIFFUSER - Small - 4 pcs For MINIMATCH and SUNMATCH 3	03.5778 € 15.90

Go to page 30 to see other diffusers, suspensions and accessories



GENERAL work lights

A B C D E

SPECIALIZED work lights

CM EX UV



MULTIMATCH series



	CM MULTIMATCH R	CM MULTIMATCH 3 CONNECT	CM MULTIMATCH 8 CONNECT
Product number	03.5658	03.5675C	03.5676C
Light source	Ultra-high CRI+ COB LED	Ultra-high CRI+ COB LED	Ultra-high CRI+ COB LED
Luminous flux, lumen	120-1200	300-3000	800-8000
Adjustable light output	5 levels	5 levels	5 levels
Beam angle	100°	115°	115°
CRI	Ra > 96 CRI+	Ra > 96 CRI+	Ra > 96 CRI+
CCT	2500-6500 K	2500-6500 K	2500K-6500 K
Adjustable CCT	Stepless	Stepless	Stepless
Operating time with max. lumen, h	0.8	3-30 h @18 V 5.2 Ah battery	1.25- 12 h @18 V 5.2 Ah battery
Operating time with min. lumen, h	10	5.5-56 h @18 V 10 Ah battery	2.25-24 h @18 V 10 Ah battery
Operating time: backup battery, h	-	2 h @300 lm	1 h @800 lm
Charging time, h	3.5	-	-
Battery	3.7 V / 5400 mAh Li-ion	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP67	IP65 with power supply IP54 with optional battery cover	IP65 with power supply IP54 with optional battery cover
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Cable	1 m USB	-	-
Charging voltage/current DC	5 V / 2 A	-	-
Power consumption	Max 16.5 W	Max 35 W	Max 80 W
Battery incl.	-	-	-
Charger incl.	Yes	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	155 x 165 x 64 mm	263 x 230 x 110 mm	305 x 292 x 131 mm
Net weight	820 g	2,36 kg	3.72 kg
Price	€ 134.90	€ 219.90	€ 329.90

*
** One lighting solution for all battery packs

JUST CONNECT

Compatible with AEG - AMPSHARE - BERNER - BOSCH - BOSCH GREEN


DEWALT - EINHELL - FEIN - FESTOOL - FLEX - HAZET - HIKOKI - HILTI

INGERSOLL - MAKITA - METABO - MILWAUKEE - PANASONIC

RIDGID - RUPES - SNAP-ON - WÜRTH



Compatible with METABO / CAS without CONNECTOR

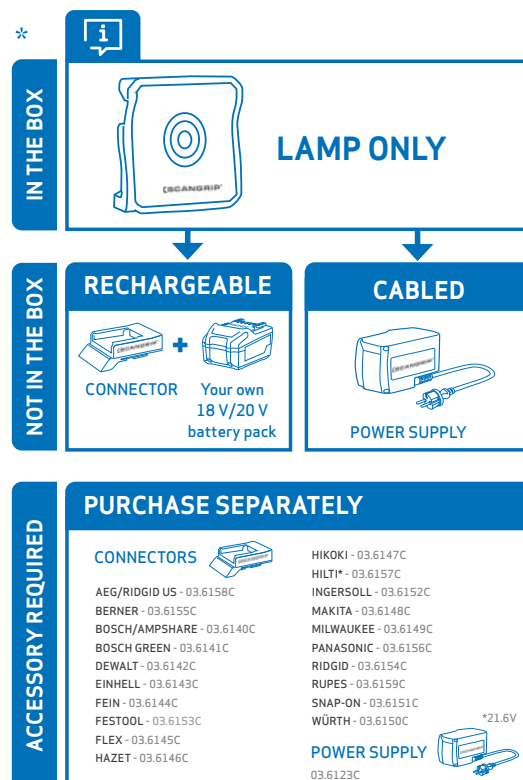



MULTIMATCH CONNECT KITS




	 MULTIMATCH 3 CONNECT incl. POWER SUPPLY	 MULTIMATCH 8 CONNECT incl. POWER SUPPLY
Product number	03.5674C	03.5679C
Content	MULTIMATCH 3 CONNECT SCANGRIP POWER SUPPLY	MULTIMATCH 8 CONNECT SCANGRIP POWER SUPPLY
Dimensions	263 x 230 x 119 mm	305 x 292 x 125 mm
Net weight	2.36 kg	3.52 kg
Price	€ 274.90	€ 379.90

**



JUST CONNECT

IN THE BOX

 **LAMP & POWER SUPPLY**



Handlamps

ZONE
2/22ZONE
0/20

Headlamp

ZONE
2/22

	EX MIDI-EX	EX UNI-EX
Product number	03.5611	03.5617
Light source	COB-LED Spot: SMD LED	COB-LED Spot: SMD LED
Luminous flux, lumen	100-200 Spot: 100	175-350 Spot: 150
Adjustable light output	2 levels	2 levels
Beam angle	105° Spot: 60°	100° Spot: 30°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time, h	Up to 5 Spot: 2	Up to 15 Spot: 9
Charging time, h	3.5	12
Battery	3.8 V / 1600 mAh Li-ion	3.6 V / 6700 mAh Li-ion
Protection class	IP65	IP65
Impact resistance	1 m	1 m
EX ZONE	2 and 22	0 and 20
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	-	-
Power consumption	Max 3 W	Max 3.5 W
Charger incl.	Yes	Yes
Temperature	-20 to +45 °C	-20 to +45 °C
Dimensions	181.8 x 46 x 29 mm	220 x 70 x 39 mm
Net weight	181 g	436 g
Price	€ 104.90	€ 269.90

EX EX-VIEW
03.5606
COB-LED Spot: SMD LED
200 Spot: 100
No
100° Spot: 35°
Ra > 80
6000 K
Up to 2.5 Spot: 3.5
3.5
3.8 V / 1600 mAh Li-ion
IP65
1 m
2 and 22
1 m USB
-
-
Max 1.6 W
Yes
-20 to +45 °C
95 x 55 x 43 mm
142 g
€ 104.90

SEE VIDEO WITH
THE EX PROOF
PRODUCTS

NOVA-EX series

ZONE
1/21ZONE
1/21

	EX NOVA-EX	EX NOVA-EX R
Product number	03.5619	03.5618
Light source	High CRI COB LED	High CRI COB LED
Luminous flux, lumen	1700-3400	2000-4000
Adjustable light output	2 levels	2 levels
Beam angle	110°	100°
CRI	Ra > 95	Ra > 95
CCT	6000 K	6000 K
Operating time, h	-	Up to 4 h
Charging time, h	-	3
Battery	-	21.6 V / 3350 mAh Li-ion
Protection class	IP65	IP65
Impact resistance	1 m	1 m
EX ZONE	1 and 21	1 and 21
Cable	10 m / 3 x 1 mm ² H05RN-F	5 m / 2 x 0.75 mm ² H05RN-F
Operating voltage AC	100-240 V 50/60 Hz	-
Charging voltage/current DC	-	21.6 V / 1 A
Power consumption	35 W	31 W
Charger incl.	-	Yes
Temperature	-20 to +45 °C	-20 to +45 °C
Dimensions	270 x 266 x 123 mm	270 x 261 x 130 mm
Net weight	5.3 kg	4.3 kg
Price	€ 459.90	€ 749.90

EX ACCESSORIES	Product number	Price
 ZONE 1/21 MAGNETIC BRACKET EX For flexible positioning on any magnetic surface.	03.5616	€ 59.90
 ZONE 1/21 SCAFFOLDING BRACKET EX Designed to fix NOVA-EX work lights on scaffolding or any round object ø40-50 mm.	03.5609	€ 39.90
 ZONE 1/21 TRIPOD EX 1.35 - 3 m.	03.5607	€ 139.90

SCANGRIP accessories are approved to be used in explosive atmosphere, zone 1 and 21, in combination with NOVA-EX and NOVA-EX R





SPS7//
SCANGRIP POWER SOLUTION

Incl. UV-PROTECTION
GLASSES and NYLON BAG

UV CURING series

	UV LIGHT	NOVA-UV S	UV-GUN
Product number	03.5801	03.5802	03.5803
Light source	UV LED	UV LED	UV LED
Irradiance	At 6 cm distance Curing diameter: ø10 cm Min. irradiance: 6 mW/cm ² Center irradiance: 16 mW/cm ²	At 6 cm distance Curing diameter: ø10 cm Min. irradiance: >35 mW/cm ² Center irradiance: 70 mW/cm ² At 16 cm distance Curing diameter: ø25 cm Min. irradiance: >6 mW/cm ² Center irradiance: 12 mW/cm ²	At 10 cm distance Curing diameter: ø18 cm Min. irradiance: >68 mW/cm ² Center irradiance: 340 mW/cm ² At 56 cm distance Curing diameter: ø68 cm Min. irradiance: >6 mW/cm ² Center irradiance: 14 mW/cm ²
Curing area	75 cm ²	75 cm ² at 6 cm distance 490 cm ² at 16 cm distance	250 cm ² at 10 cm distance 3600 cm ² at 56 cm distance
Wavelength	390-400 nm	395-400 nm	395-400 nm
Operating time with max. lumen	1.5	1.5	40 min
Operating time with min. lumen	-	-	-
Charging time, h	4	3.5	2*
Battery	3.7 V / 2600 mAh	3.7 V / 5400 mAh	11.1 V / 8000 mAh
Protection class	IP30	IP30	IP30
Impact protection	IK07	IK07	IK06
Impact resistance	1 m	1 m	1m
Cable	1 m USB	1 m USB	5 m / 2 x 0,75 mm ² H05RN-F
Charging voltage/current DC	5 V / 1 A	5 V / 2 A	12.6 V / 4 A
Power consumption	3 W	12 W	120 W
Battery incl.			SPS BATTERY 03.6004
Charger incl.	No	Yes	SPS CHARGING SYSTEM 50 W 03.6007
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	190 x 60 x 32 mm	163 x 63 x 163 mm	215 x 96 x 300 mm
Net weight	270 g	705 g	1.89 kg incl. battery
Price	€ 179.90	€ 429.90	€ 1349.90

* 80%

SCANGRIP POWER SOLUTION accessories

SPS7//
SCANGRIP POWER SOLUTION



SPS BATTERY 8Ah	SPS CHARGING SYSTEM 50W
03.6004	03.6007
11.1 V / 8000 mAh Li-ion	-
12.6 V / 6.8 A	12.6 V / 4 A
-	5 m / 2 x 0,75 mm ² H05RN-F
-	100-240 V AC 50/60 Hz
-	Max 50 W
1.5*	-
IP67 / IK07	IP67 / IK07
1 m	1 m
-10 to +40 °C	-10 to +40 °C
103 x 75 x 62 mm	139 x 75 x 49 mm
560 g	700 g
€ 79.90	€ 59.90

UV-LIGHT

NOVA-UV S

UV-GUN

ø10 cm

ø25 cm


ø68 cm

SEE VIDEO WITH
THE UV CURING
PRODUCTS



ACCESSORY	Product number	Price
 UV PROTECTION GLASSES Verified protection against the complete UV spectrum up to 400 nm.	03.5759	€ 21.90

UV CURING series



UV	UV-EXTREME	UV-EXTREME PLUS
Product number	03.5272	03.5273
Light source	UV LED	UV LED
Irradiance	At 60 cm distance Curing diameter: ø 95 cm Min. irradiance: >6 mW/cm ² Center irradiance: 16 mW/cm ²	At 80 cm distance Curing size: 135x130 cm Min. irradiance: >6 mW/cm ² Center irradiance: 18 mW/cm ²
	At 40 cm distance Curing diameter: ø 90 cm Min. irradiance: >6 mW/cm ² Center irradiance: 35 mW/cm ²	At 40 cm distance Curing size: 110x100 cm Min. irradiance: >6 mW/cm ² Center irradiance: 68 mW/cm ²
	At 10 cm distance Curing diameter: ø 22 cm Min. irradiance: >80 mW/cm ² Center irradiance: 398 mW/cm ²	At 10 cm distance Curing size: 34x24 cm Min. irradiance: >120mW/cm ² Center irradiance: 490mW/cm ²
Curing area	7000 cm ² at 60 cm distance 6300 cm ² at 40 cm distance 380 cm ² at 10 cm distance	13000cm ² at 80 cm distance 8600cm ² at 40 cm distance 640cm ² at 10 cm distance
Wavelength	395-400nm	395-400nm
Protection class	IP30	IP30
Impact protection	IK08	IK08
Impact resistance	1 m	1m
Cable	5 m / 2x1.0 mm ² H05RN-F	5 m / 2x1.0 mm ² H05RN-F
Operating voltage AC	220-240 V	220-240 V
Charging voltage/current DC	-	-
Power consumption	300 W	600 W
Temperature	-10° to +40°C	-10° to +40°C
Dimensions	278 x 241 x 160 mm	415 x 241 x 160 mm
Net weight	4.95 kg	6.70 kg
Price	€ 2099.90	€ 3149.90

RISK GROUP 3

Verified UV protection face visor is included



UV ACCESSORY	Product number	Price
 MOUNTING BRACKET FOR UV-EXTREME and UV-EXTREME PLUS on 03.5682 WHEEL STAND	03.5915	€ 49.90



03.5682 WHEEL STAND

COMPATIBILITY

SCANGRIP specialized LED work lights for UV CURING has been tested and proven successfully on leading brands of UV-cured products.





Scan the QR code

SCANGRIP Accessories

To give you maximum flexibility, we have made a complete concept of accessories that allow you to place the lamps exactly where you need it wherever you are.

 Product description	Function	Compatibility	Product number	Price
 SCANGRIP DIFFUSER MEDIUM Diffuses and softens the light		NOVA R MULTIMATCH R NOVA 2 CONNECT	03.5922	€ 8.90
 SCANGRIP DIFFUSER Provides a large dispersion and spreads the light		MULTIMATCH 3 CONNECT NOVA 4, 4 C+R NOVA 4 CONNECT	03.5750	€ 10.90
 SCANGRIP DIFFUSER - Large Provides a large dispersion and spreads the light		MULTIMATCH 8 CONNECT NOVA 10 CONNECT	03.5751	€ 15.90
 SCANGRIP DIFFUSER X-Large Provides a large dispersion and spreads the light		NOVA, 6 C+R, 6	03.5951	€ 19.90
 SCANGRIP DIFFUSER XX-Large Provides a large dispersion and spreads the light		NOVA 12	03.5952	€ 24.90
 SCAFFOLDING BRACKET For flexible positioning on scaffoldings or any round object ø40-50 mm		MULTIMATCH R, MULTIMATCH 3, 8 CONNECT NOVA 4, 4 C+R, 6, 6 C+R, 12 NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA 2, 4 CONNECT VEGA LITE, C+R, COMPACT, COLOUR	03.5341	€ 34.90
 MAGNET BRACKET For flexible positioning of the work light on any magnetic surface		MULTIMATCH 3 CONNECT NOVA 4, 4 C+R NOVA 4 CONNECT	03.5390	€ 31.90
 MAGNET BRACKET - Large For flexible positioning of the work light on any magnetic surface		MULTIMATCH 3, 8 CONNECT NOVA 6, 6 C+R, 12, 4, 4 C+R NOVA 4, 10 CONNECT	03.5391	€ 54.90
 C+R CAR ADAPTER For easy charging on the go with DUAL SYSTEM 2 in 1 products		LINE LIGHT BONNET C+R LINE LIGHT C+R NOVA 4 C+R, 6 C+R VEGA LITE C+R	03.5342	€ 31.90
 USB CAR CHARGER Easy charging from the cigarette socket when on the move		Fits all SCANGRIP lighting products with USB compatibility. 5 V, 12-24 V	03.5301	€ 9.60
 POWERBANK with 4000 mAh aluminum battery and spiral cable. 5 V / 2 A. Ø28 x 103 mm. 130g		For recharging any SCANGRIP work light as well as other devices	03.5782	€ 34.90



C	Product description	Function	Compatibility	Product number	Price
	SCANGRIP TRIPOD 2M 0.78 - 2 m 2.1 kg Max load 5 kg		MULTIMATCH R, MULTIMATCH 3, 8 CONNECT NOVA R, 4, 4 C+R, 6, 6 C+R, 12 NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA 2, 4 CONNECT VEGA LITE, C+R, COMPACT, COLOUR DUO CONNECT	03.5685	€ 89.90
	SCANGRIP TRIPOD 3M 1.35 - 3 m 6 kg Max load 10 kg		AREA 6 CONNECT AREA 10 CONNECT AREA LITE CO MULTIMATCH R, MULTIMATCH 3, 8 CONNECT NOVA R, 4, 4 C+R, 6, 6 C+R, 12 NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA LITE, C+R, COMPACT, COLOUR SITE LIGHT 40, 80 UV-EXTREME UV-EXTREME PLUS	03.5431	€ 129.90
	SCANGRIP WHEEL STAND 0.9 - 1.9 m 6.6 kg Max load 10 kg		AREA 6 CONNECT AREA 10 CONNECT AREA LITE CO MULTIMATCH R, MULTIMATCH 3, 8 CONNECT NOVA R, 4, 4 C+R, 6, 6 C+R, 12 NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA 2, 4 CONNECT VEGA LITE, C+R, COMPACT, COLOUR UV-EXTREME UV-EXTREME PLUS	03.5682	€ 169.90
	DUAL BRACKET Dual bracket for positioning of two lamps on TRIPOD 3M and WHEEL STAND		MULTIMATCH R, MULTIMATCH 3, 8 CONNECT NOVA R, 4, 4 C+R, 6, 6 C+R, 12 NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA LITE, C+R, COMPACT, COLOUR	03.5308	€ 29.90

Technical terms and details in 13 languages

SCANGRIP is known worldwide for its wide and comprehensive ranges of LED work lights. In the table below, you can find all the technical terms in a range of languages.

UK	DE	FR	IT
Product number	Artikelnummer	Référence	Codice prodotto
Light source	Lichtquelle	Source lumineuse	Sorgente luminosa
OPTILight setting	OPTILight-Einstellung	Réglage OPTILight	Impostazione OPTILight
Luminous flux, lumen	Lichtstrom, Lumen	Lumens	Flusso luminoso, lumen
Illuminance, lux@0.5 m	Lichtstärke, Lux@0,5 m	Lux à 0,5 m	Illuminamento, lux@0.5 m
Adjustable light output	Einstellbare Lichtausbeute	Réglage de la puissance	Rendimento luminoso regolabile
Beam angle	Abstrahlwinkel	Angle faisceau	Angolo del fascio
Beam distance	Leuchtwerte	Distance faisceau	Distanza fascio
Irradiance	Bestrahlungsstärke	Irradiance	Irraggiamento
Curing area	Härtefläche	Zone de durcissement	Superficie di essiccazione
Wavelength	Wellenlänge	Longueur d'onde	Lunghezza d'onda
CRI	Farbwiedergabeindex	IRC	CRI
CCT	Farbtemperatur	TCP	CCT
Operating time with max. lumen, h	Betriebsdauer mit max. Lumen, Std.	Autonomie avec lumens maxi. (h)	Ore auton. a max. potenza lumen
Operating time with min. lumen, h	Betriebsdauer mit min. Lumen, Std.	Autonomie avec lumens mini. (h)	Ore auton. a min. potenza lumen
Operating time: backup battery, h	Betriebsdauer: Reserveakku, Std.	Autonomie batterie de secours, (h)	Autonomia: batteria tampone, h
Operating time OPTILight, h	Betriebsdauer OPTILight, Std.	Autonomie OPTILight, h	Autonomia OPTILight, h
Charging time, h	Ladedauer, Std.	Temps de charge (h)	Tempo di ricarica, h
Battery	Akku	Batterie	Batteria
Verified no. of charging cycles	Geprüfte Anzahl von Ladezyklen	Nombre vérifié de cycles de charge	Cicli di ricarica certificati
Protection class	IP-Schutzart	Étanchéité	Classe di protezione
Rough service	Baustellentauglich	Usage intensif	Utilizzi gravosi
Impact protection	Stoßfestigkeitsgrad	Protection contre les chocs	Protezione contro gli urti
Impact resistance	Stoßfestigkeit	Résistance aux chocs	Resistenza alle cadute
Operating voltage AC	Nennspannung AC	Tension d'alimentation	Tensione di esercizio AC
Charging voltage /current DC	Ladespannung/Ladestrom DC	Tension de charge	Tensione di ricarica / corrente continua
Cable	Kabel	Câble	Cavo
Charger input voltage	Eingangsspannung	Tension d'alimentation	Tensione del caricabatterie
Output power / Max. load	Ausgangsleistung	Consommation	Potenza di uscita
Power consumption	Leistungsaufnahme	Consommation électrique	Consumo di corrente
Battery incl.	Einschl. Akku	Batteries incluse	Batteria incl.
Charger incl.	Mit Ladegerät	Chargeur inclus	Caricabatterie incl.
SCANGRIP power supply incl.	SCANGRIP Stromversorgung einschl.	Alimentation SCANGRIP incluse	Alimentatore SCANGRIP incl.
Temperature	Temperatur	Température d'utilisation	Temperatura
Dimensions	Abmessungen	Dimensions	Dimensioni
Net weight	Nettogewicht	Poids net	Peso netto
Price	Preis	Prix	Prezzo

PT	ES	SE	DK
Número do artigo	Referencia de producto	Artikelnummer	Produktnummer
Fonte de luz	Fuente de luz	Ljuskälla	Lyskilde
Definição da luz OPTILight	Control función OPTILight	OPTILight-inställning	OPTILight indstilling
Fluxo luminoso, lúmen	Flujo luminoso, lumen	Ljusflöde, lumen	Lysstrøm, lumen
Iluminação, lux@0,5 m	Iluminación lux@0,5 m	Illuminans, lux@0,5 m	Belysningsstyrke, lux@0,5 m
Intensidade de luz ajustável	Intensidad de luz ajustable	Justerbart ljusflöde	Justerbart lysudbytte
Ângulo de luz	Ángulo de luz	Strålvinkel	Lysvinkel
Distância do feixe	Distancia del haz	Strålavstånd	Lyskeglélængde
Irradiação	Irradicación	Irradians	Bestrålningsstyrke
Área de secagem	Área de secado	Härdningsarea	Hærdeområde
Comprimento de onda	Longitud de onda	Våglängd	Bølgelængde
CRI	IRC	CRI	Farvegengivelse
CCT	CCT	CCT	Farvetemperatur
Tempo de funcionamento com máx. lumens, h	Autonomía a máxima potencia (h.)	Driftstid med max. lumen, timmar	Driftstid med max. lumen
Tempo de funcionamento com mín. lumens, h	Autonomía a mínima potencia (h.)	Driftstid med min. lumen, timmar	Driftstid med min. lumen
Tempo de funcionamento com bateria interna, h	Autonomía con batería interna (h.)	Driftstid: reservbatteri, timmar	Driftstid backup batteri
Tempo de funcionamento OPTILight, h	Tiempo de funcionamiento OPTILight, h	Drifttid OPTILight, h	Driftstid OPTILight, t.
Tempo de carregamento, h	Tiempo de carga (h.)	Laddningstid, timmar	Ladetid
Bateria	Batería	Batteri	Batteri
N.º verificado de ciclos de carga	Número probado de ciclos de carga	Verifierat antal laddningscykler	Bekræftet antal opladningscyklusser
Classe de proteção	Clase de protección	Skyddsklass	IP-klasse
Serviço intensivo	Uso intensivo	Grov service	Hårdhændet brug
Proteção contra impacto	Protección contra impactos	Slagskydd	IK-klassifikation
Resistência a impactos	Resistencia al impacto	Stöttålighet	Faldtest
Tensão operacional AC	Tensión de funcionamiento CA	Driftspänning AC	Driftsspænding AC
Tensão de carregamento/ corrente DC	Tensión/corriente DC de carga	Laddningsspänning/befintlig DC	Ladespænding DC
Cabo	Cable	Kabel	Kabel
Tensão de entrada do carregador	Voltaje de entrada cargador	Inspänning, laddare	Lader, indgangsspænding
Potência de saída	Potencia de salida	Uteffekt	Udgangseffekt
Cosumo de energia	Consumo energía	Energiförbrukning	Effektforbrug
Bateria incl.	Batería incl.	Inkl. batteri	Inkl. batteri
Carregador incl.	Cargador incl.	Inkl. laddare	Inkl. lader
Fonte de energia incluída	SCANGRIP Power Supply incl.	Inkl. SCANGRIP strömförsörjning	Inkl. SCANGRIP strømforsyning
Temperatura	Temperatura	Temperatur	Driftstemperatur
Dimensões	Dimensiones	Mått	Dimensioner
Peso líquido	Peso neto	Nettovikt	Nettovægt
Preço	Precio	Pris	Pris

See next page for NO- FI-NL- PL- CZ

Technical terms and details in 13 languages

SCANGRIP is known worldwide for its wide and comprehensive ranges of LED work lights. In the table below, you can find all the technical terms in a range of languages.

UK	NO	FI	NL
Product number	Artikkelnummer	Tuotenumero	Productnummer
Light source	Lyskilde	Valonlähde	Lichtbron
OPTILight setting	OPTILight-innstilling	OPTILight-asetus	Instelling OPTILight
Luminous flux, lumen	Lysstrøm, lumen	Valovirta, lumen	Lichtstroom, lumen
Illuminance, lux@0.5 m	Belysningsstyrke, lux@0,5 m	Iluminanssi, lux@0.5 m	Verlichting, lux@0,5 m
Adjustable light output	Justerbar lysstyrke	Säädettävä valoteho	Aanpasbare lichtopbrengst
Beam angle	Strålevinkel	Sädekulma	Stralingshoek
Beam distance	Stråleavstand	Säteen etäisyys	Stralingsafstand
Irradiance	Irradians	Säteilyalttius	Bestraling
Curing area	Herdeområde	Kovettumisalue	Uithardingsgebied
Wavelength	Bølgelengde	Aallonpituus	Golflengte
CRI	CRI	CRI	CRI
CCT	CCT	CCT	CCT
Operating time with max. lumen, h	Driftstid med maks. lumen, t	Toiminta-aika maksimilumenilla, h	Bedrijfstijd met max. lumen, u
Operating time with min. lumen, h	Driftstid med min. lumen, t	Toiminta-aika min. valovoimalla, h	Bedrijfstijd met min. lumen, u
Operating time: backup battery, h	Driftstid: reservebatteri, t	Toiminta-aika: vara-akku, h	Bedrijfstijd: back-upaccu, u
Operating time OPTILight, h	Driftstid OPTILight, t	Käyttöaika OPTILight, h	Bedrijfstijd OPTILight, u
Charging time, h	Ladetid, t	Latausaika, h	Oplaadtijd, u
Battery	Batteri	Akku	Accu
Verified no. of charging cycles	Verifisert antall ladesykluser	Todennettu latausjaksojen määrä	Gecontroleerd aantal laadcyclussen
Protection class	Beskyttelsesklasse	Suojausluokka	Beschermingsklasse
Rough service	Tøff bruk	Karkea palvelu	Rough service
Impact protection	Støtbeskyttelse	Törmäyssuojaus	Stootbeveiliging
Impact resistance	Slagfasthet	Iskunkestävyys	Stootweerstand
Operating voltage AC	Driftsspenning AC	Käyttöjännite AC	Bedrijfsspanning AC
Charging voltage /current DC	Ladespenning/strøm DC	Latausjännite/virta DC	Laadspanning/-stroom DC
Cable	Kabel	Kaapeli	Kabel
Charger input voltage	Inngangsspenning lader	Laturin tulojännite	Ingangsspanning lader
Output power / Max. load	Utgangseffekt / Maks. belastning	Lähtöteho / maksimikuorma	Uitgangsvermogen
Power consumption	Strømforbruk	Virrankulutus	Energieverbruik
Battery incl.	Batteri inkl.	Akku sis.	Accu inbegrepen
Charger incl.	Lader inkl.	Laturi sis.	Lader inbegrepen
SCANGRIP power supply incl.	SCANGRIP power supply inkl.	SCANGRIP-virtalähde sis.	SCANGRIP-voeding inbegrepen
Temperature	Temperatur	Lämpötila	Temperatuur
Dimensions	Dimensjoner	Mitat	Afmetingen
Net weight	Netto vekt	Nettopaino	Netto gewicht
Price	Pris	Hinta	Prijs

PL

CZ

Numer produktu	Číslo výrobku
Źródło światła	Zdroj světla
Ustawienie OPTILight	Nastavení OPTILight
Strumień świetlny, lumen	Světelný tok, lumen
Natężenie oświetlenia, luksy z 0,5 m	Osvětlení, lux ve vzdálenosti 0,5 m
Regulowana moc świetlna	Nastavitelný světelný výkon
Kąt wiązki	Úhel paprsku
Zasięg wiązki	Vzdálenost paprsku
Natężenie promieniowania	Ozáření
Obszar utwardzania	Vytvrzovací plocha
Długość fali	Vlnová délka
CRI	Index podání barev, CRI
CCT	Náhradní teplota chromatičnosti, CCT
Czas pracy przy maks. natężeniu światła, w godz.	Provozní doba s max. lumenů, h
Czas pracy przy min. natężeniu światła, w godz.	Provozní doba s min. lumenů, h
Czas pracy: akumulator awaryjny, w godz.	Provozní doba: záložní baterie, h
Czas działania OPTILight, h	Provozní doba OPTILight, h
Czas ładowania, w godz.	Doba nabíjení, h
Akumulator	Baterie
Zweryfikowana liczba cykli ładowania	Ověřený počet nabíjecích cyklů
Stopień ochrony	Třída ochrany
Odporność na wymagające warunki	Hrubý provoz
Ochrona przed uderzeniami	Ochrana při nárazu
Odporność na uderzenia	Odolnost proti nárazu
Napięcie robocze AC	Provozní napětí AC
Napięcie/prąd ładowania DC	Nabíjecí napětí/proud DC
Kabel	Kabel
Napięcie wejściowe ładowarki	Vstupní napětí nabíječky
Moc wyjściowa	Výstupní výkon
Zużycie energii	Příkon
Bateria w zestawie	Včetně baterie
Ładowarka w zestawie	Včetně nabíječky
Zasilacz SCANGRIP w zestawie	Včetně napájecího zdroje SCANGRIP
Temperatura	Teplota
Wymiary	Rozměry
Masa netto	Čistá hmotnost
Cena	Cena





// SCANGRIP is Europe's leading manufacturer of work lights for professionals providing the strongest and most comprehensive ranges of work lights with the latest LED lighting technology available on the market.

SCANGRIP is innovation from Denmark and receives strong recognition in the marketplace for its product design, and the products are known for their high quality.

SCANGRIP strives for perfection, and is continuously optimizing and improving light output, battery capacity, design and ergonomics, durability, user-friendliness, and functionality. The aim is to set new standards for professional work lights.

SCANGRIP was established in 1906 and has a long, impressive history of manufacturing high-quality hand tools and work lights for the industrial, construction, and automotive sectors.

SCANGRIP is part of Hultafors Group - a global company offering a unique portfolio of premium brands within personal protection, tools, and other equipment for discerning craftsmen. Together, we are on a mission to create a better day for professional users.

Follow us at

